


# Low Profile Conveyor M1925

# MONK

## Roller size 25mm diameter

Belt width 40 to 400mm.  
 Length 300 to 3 meters.  
 Backbone 20mm square extruded section.  
 Tee slots for M6 fixings  
 Bed plate stainless steel.  
 Optional stainless steel side guides.  
 Motors 230v 30W or 415v/3ph/50hz 40W.  
 Thermal overload protection switch.  
 Continuous rating.  
 B class insulation & terminal box to Ip54.  
 Belt speeds from 0.1m.min to 27m/min.  
 Variable speed option.  
 Adjustable drive position.  
 Food quality belt option - blue or white.

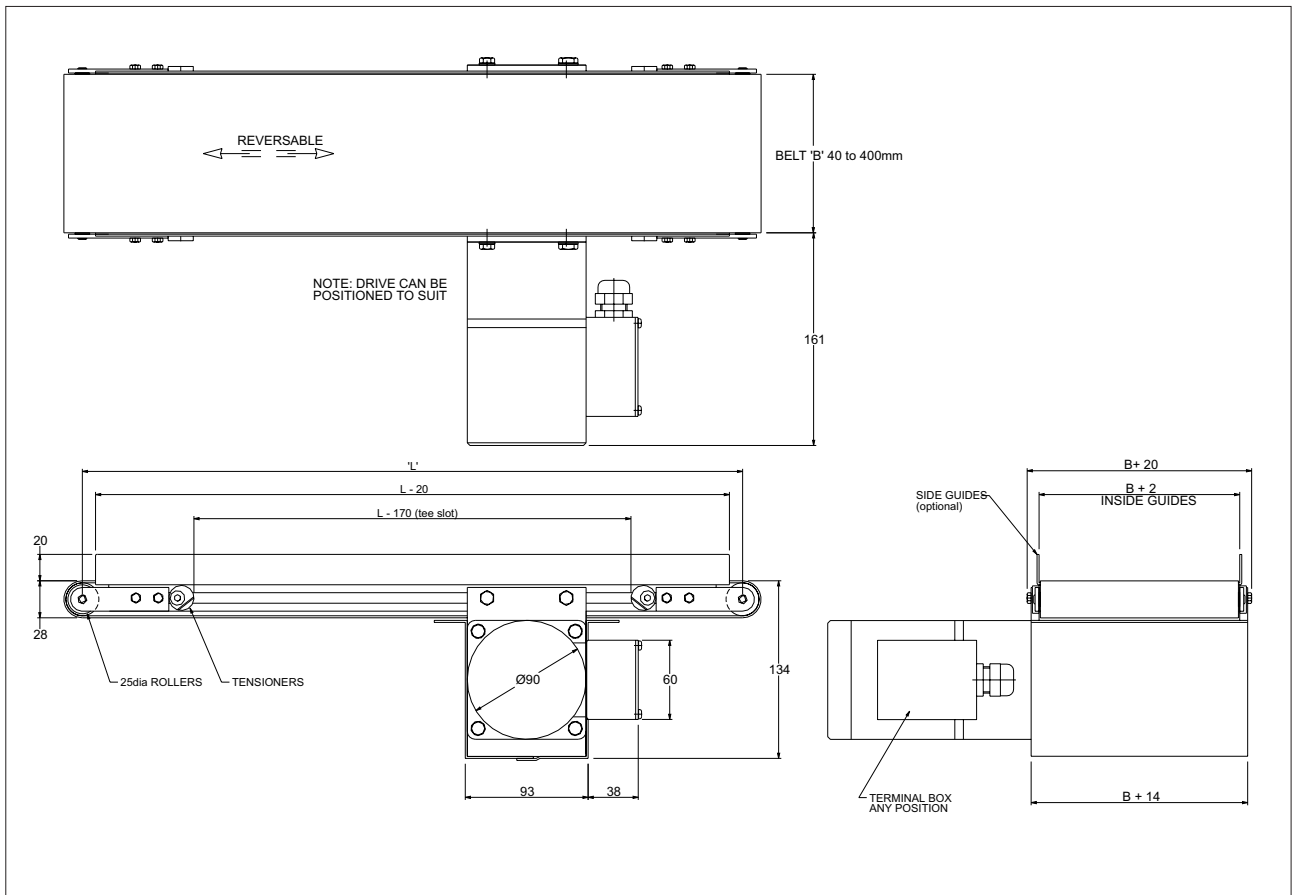


### FIXED SPEED M1950-CDF

GEARBOX OUTPUT RPM	BELT SPEED M/min	DIMENSION 'M'
130	27	154
87	18	154
65	13	172
52	11	172
43	9	172
26	5	172
17	3.5	172
13	2.7	172
11	2.2	172
7	1.5	172
5	1	212
2.6	0.5	212
1.3	0.3	212
0.7	0.14	212

### VARIABLE SPEED M1950-CDF

GEARBOX RPM	BELT SPEED M/min		TORQUE @ BELT Nm	DIMENSION 'M'
	MIN	MAX		
127	5.4	27	0.27	168
85	4.6	23	0.4	168
64	3.6	18	0.5	177
51	2.7	14	0.62	177
42	2.2	11	0.74	177
25	1.8	9	1.24	177
17	1.1	5.4	1.73	177
11	0.75	3.6	1.45	177
7	0.22	0.1	2.45	177

### ORDERING EXAMPLE

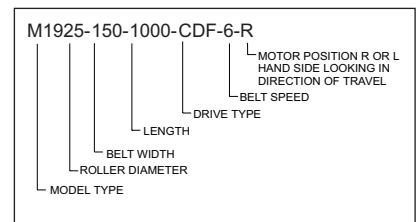

Monk Conveyors Limited Woodside House, Woodside Park, Catteshall Lane, Godalming, Surrey GU7 1LG  
 Tel: 01483 791700 Fax: 01483 791701 Email: sales@monk-automation.co.uk [www.monk-conveyors.co.uk](http://www.monk-conveyors.co.uk)