

Doors for Rapid Fix - An Innovative Machine Protection System

The Rapid Fix system is available with an assortment of doors that includes single and double swing doors, as well as single and double sliding doors.

The doors can be supplied pre-assembled as a unit to be installed on site. The pre-assembled doors are equipped with a Troax Safe Lock. The safety switch in the lock is pre-adjusted and there is no need to readjust it once installation is complete. Door frames are made of a sturdy profile which is secured by sleeves during transport for protection.

ADVANTAGES

Rapid Fix can be easily installed first by fixing the foot to the floor. Then the pre-assembled door is slotted in once the bushings are removed. The door is then ready for use.

APPLICATIONS


Doors are available in the following:
Widths - 700, 800, 1000 and 1200mm.
Heights - 1400, 1800 and 2200mm.

FEATURES

Doors are equipped with a Troax Safe Lock: Safe Lock 3 and 4-state category II. The category II can easily be upgraded to category IV.



Pre-assembled doors complete with a Troax Safe Lock make for quick installation.

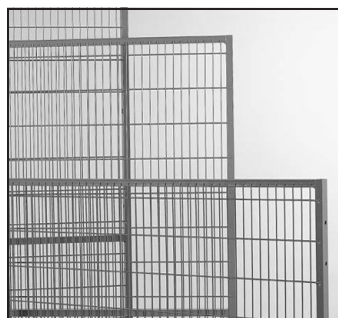

A variety of doors is available in different heights and widths to meet industry demands.



Troax Safe Lock is available in different security categories. See Safe Lock leaflet for details.



The door posts are made of sturdy profiles, which can withstand a considerable strain.



The door is delivered with bushings which are detached before installation.



The Rapid Fix system meets European Machine Directives.



Ergonomically designed handles for easy use.

FACTS

Product number, component and height:

Product number:	Component:
Door H=1400 mm 29xxxxxx (Choose width from productsheet Safe T) 39202091 39202001 39702011 39700049 29xxxxxx (Choose from the Safe Lock prod.sheet)	Mesh Panel ST Door Angle Door Post L=1400 left Door Post L=1400 right Door Kit 60x60 Safe Lock
Door H=1800 mm 29xxxxxx (Choose width from productsheet Safe T) 39202101 39202021 39202031 39700049 29xxxxxx (Choose from the Safe Lock prod.sheet)	Mesh Panel ST Door Angle Door Post L=2200 left Door Post L=2200 right Door Kit 60x60 Safe Lock
Door H=2200 mm 99xxxxxx (Choose width from productsheet Safe T) 39202111 39202021 39202031 39700049 29xxxxxx (Choose from the Safe Lock prod.sheet)	Mesh Panel ST Door Angle Door Post L=2200 left Door Post L=2200 right Door Kit 60x60 Safe Lock
For H=1800 mm and 2200 mm depending on panelwidth: 39202203 39202223 39202253 39202243	Doorstay L=860 mm Doorstay L=960 mm Doorstay L=1160 mm Doorstay L=1360 mm

Profile dimension:

20x30x1.25 mm

Door Post dimension:

60x60x2 mm

Wire dimension:


3,0x3,75 mm

Standard Colour:

Grey RAL 7037

Yellow RAL 1018

Black RAL 9005

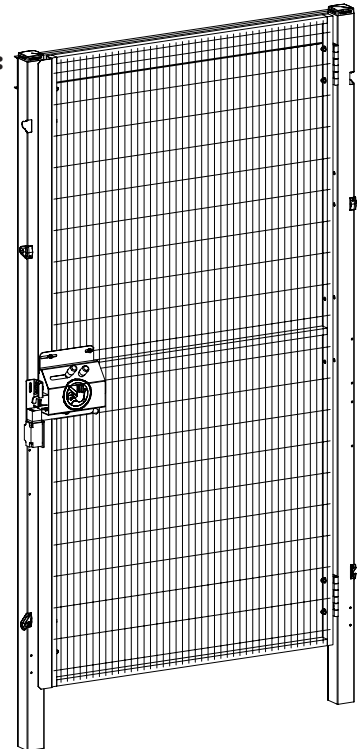

For doors equipped with Euchner cat. II 4 stage, you need a profile and doorstay from below.

Accessories/ Options

Operation pre-assembled door:

- Extra for pre-assembled Swing door Safe Lock
Product number: 39800010

Profiles to Euchner cat. II 4 stage (Width 150 mm):

- 4 stage profile L=1200 mm
Product number: 29600801
- 4 stage profile L=1600 mm
Product number: 29600811
- 4 stage profile L=2000 mm
Product number: 29600821

Doorstay to Euchner cat. II 4 stage:

- Doorstay L=1022 mm
Product number: 39202233
- Doorstay L=1122 mm
Product number: 39202243
- Doorstay L=1322 mm
Product number: 39202273
- Doorstay L = 1522 mm
Product number: 39202293

TROAX®

PO Box 662, Swindon, Wiltshire, SN3 5HY, United Kingdom
Phone: +44 1793 542000 Fax: +44 1793 618784
E-mail: info@troax.co.uk www.troax.com
Member of the Gunnebo security group